

## COMPACT crane

K10 mini crane is the most compact model having a width of only 650mm. It is easily transportable and able to pass through standard doors.

Mini K10 cranes can be equipped with gasoline and diesel engines as the whole range  
TORO ITALIA


### Main performance :

- 1000 kg at 1.21 m
- Extra electric motor
- Jib + 1m
- Compact size
- Suction hook

**TORO ITALIA** and his team are able to create any solution needs to meet your requirements.



Remote control

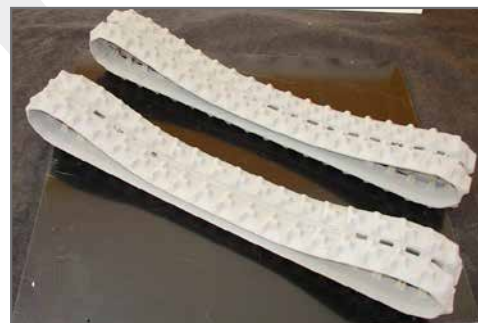





White cingulate



Basket



# minicranes

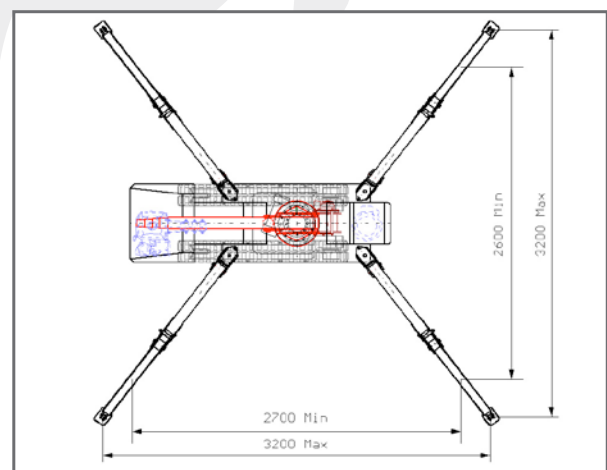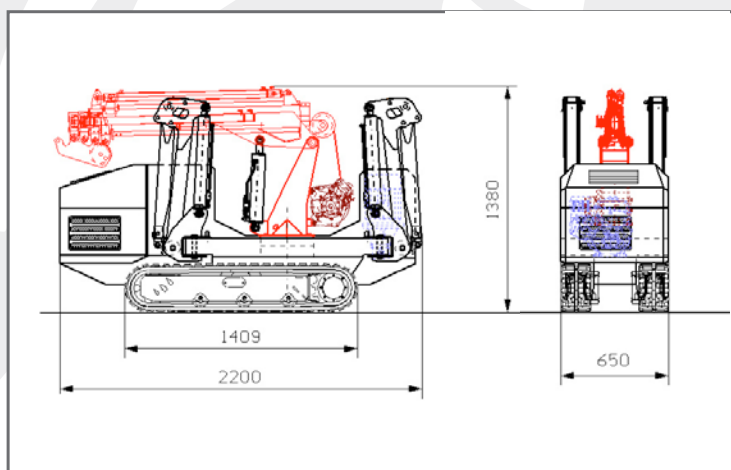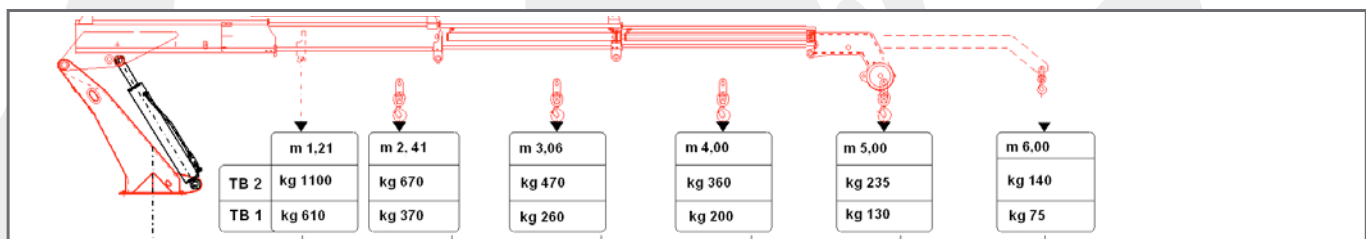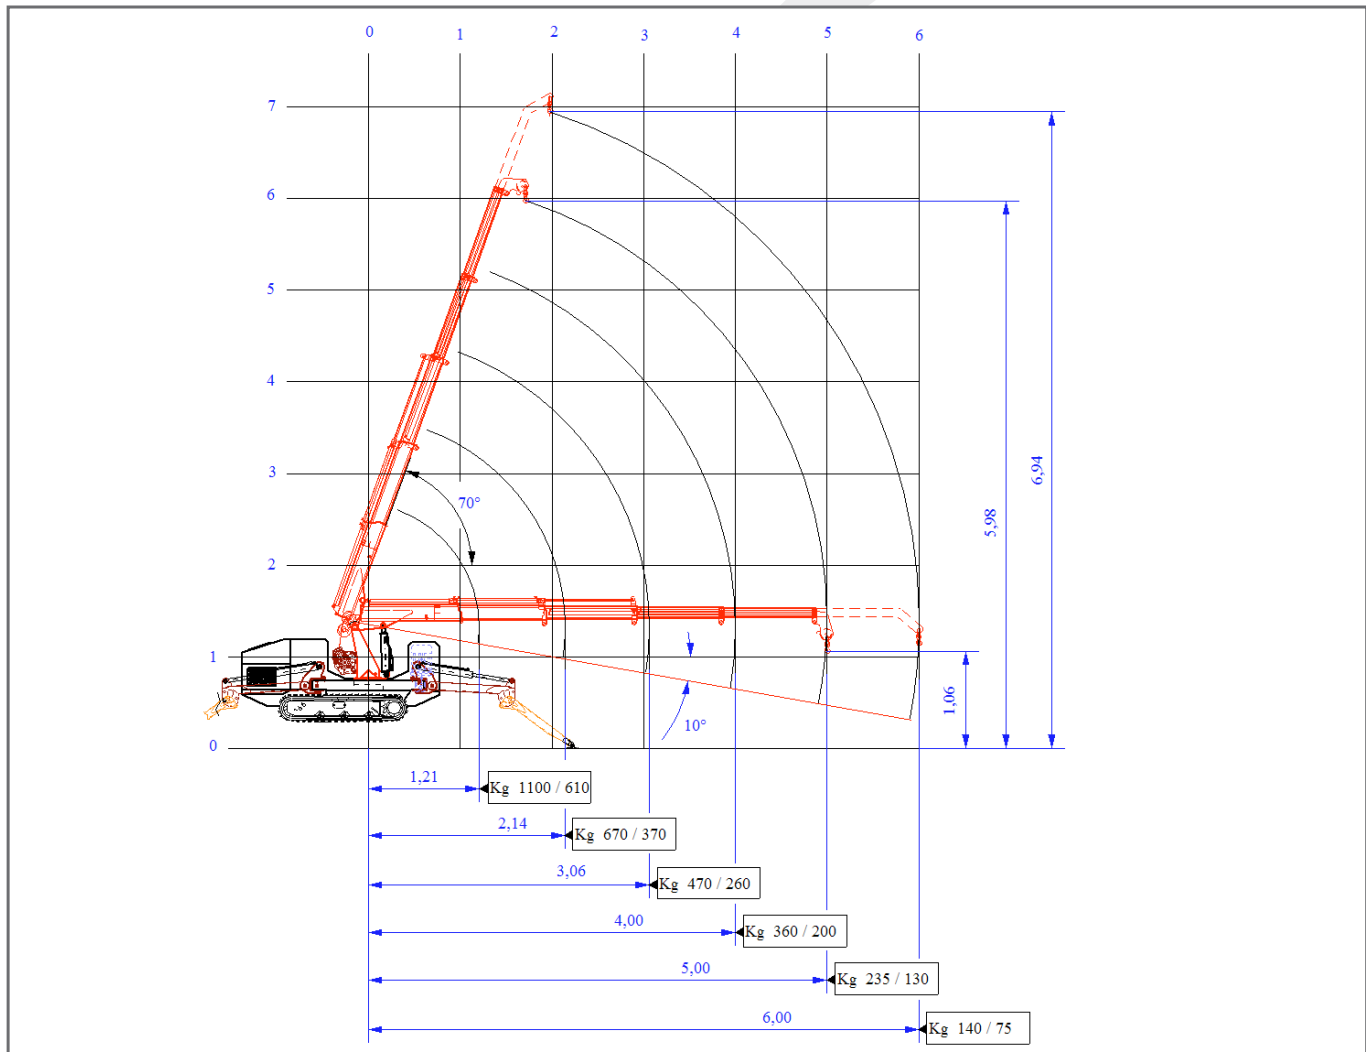

# minicranes

## K10

|                            |                                                                                                                                                                              |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MAX CAPACITY:              | 1000 Kg x 1,21 m                                                                                                                                                             |
| ENGINE:                    | Model: Mitsubishi                                                                                                                                                            |
|                            | Type: 5.5Kw - 1800min rpm                                                                                                                                                    |
|                            | Power: Petrol                                                                                                                                                                |
|                            | Tank capacity: 6L                                                                                                                                                            |
|                            | Starting method : Electric                                                                                                                                                   |
| ELECTRIC MOTOR:            | Type: 2,2Kw/6kw                                                                                                                                                              |
|                            | Size: 220V/380v                                                                                                                                                              |
| WINCH ROPE LENGTH:         | Size: Ø6 mm x 30 m                                                                                                                                                           |
|                            | Single line speed: 40M/min                                                                                                                                                   |
|                            | Hook speed: 13M/m (3 line)                                                                                                                                                   |
| DIMENSIONS:                | 2200 X 650 x 1380 mm                                                                                                                                                         |
| WEIGHT:                    | Standard Version: 1100 Kg                                                                                                                                                    |
|                            | Electric Version: 1140 Kg                                                                                                                                                    |
| TELESCOPIC SYSTEM:         | Boom length: 5 m                                                                                                                                                             |
|                            | Telescopic speed: Total extension 30 sec                                                                                                                                     |
|                            | Boom type: 4 Section esagonal telescopic boom automatic                                                                                                                      |
|                            | Maximum lifting height: 6,94 m                                                                                                                                               |
|                            | Slew angle / speed: -10° + 70° / 15 Sec                                                                                                                                      |
| SLEW SYSTEM:               | 370° With return                                                                                                                                                             |
| OUTRIGGER SYSTEM:          | Type: Hydraulic cylindres with lock valves                                                                                                                                   |
| TRACTION SYSTEM:           | Transmission: Hydrostatic type, continue and irreversible                                                                                                                    |
|                            | Travel speed: 0-3 Km/h                                                                                                                                                       |
|                            | Gradability: 50-55%                                                                                                                                                          |
|                            | Ground length x width: 1409 X 180 mm                                                                                                                                         |
|                            | Ground pressure: 0,29 Kg/cm <sup>2</sup>                                                                                                                                     |
| CONTROL SYSTEM MINI CRANE: | Radio remote control - 30 m                                                                                                                                                  |
| STANDARD EQUIPMENT:        | Hidraulic safety valves, automatic stop slew system, tilt alarms, analogic and digital counter, black rubber tracks, work light, visual indicator angle of telescopic system |
| OPTIONAL EQUIPMENT:        | Electric winch, electric motor with hydraulic pump, white rubber tracks, jib                                                                                                 |

# minicranes

